


## Selection diagram




—●— product option  
 —▶— accessory sold separately

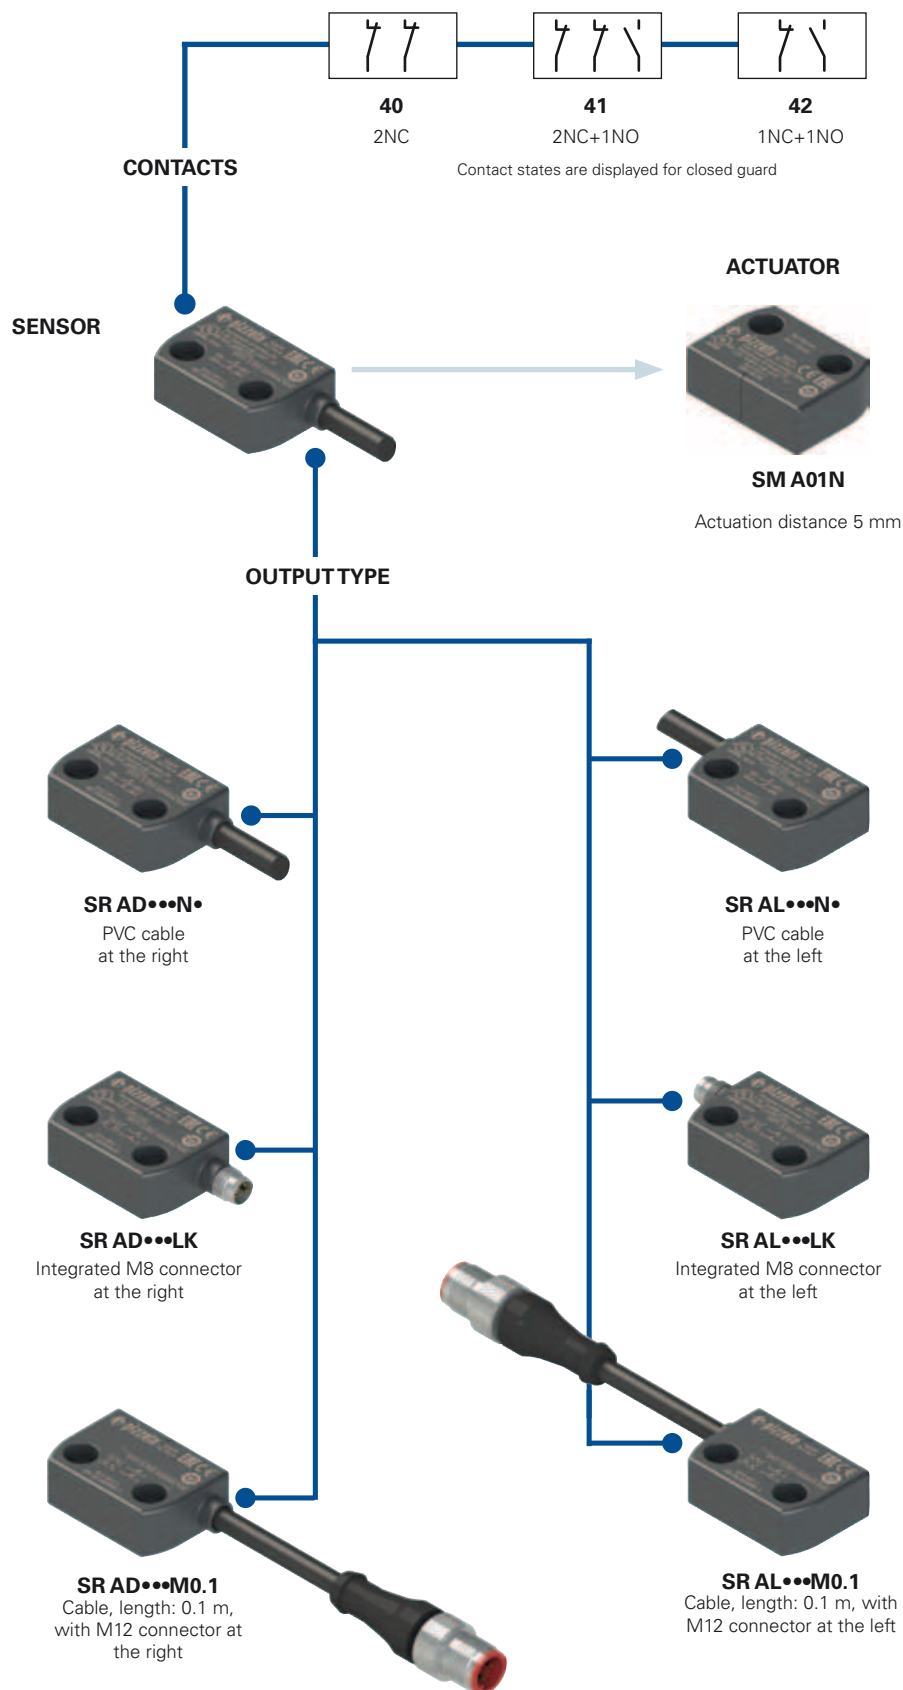


**Attention!** The feasibility of a code number does not mean the effective availability of a product. Please contact our sales office.

## Code structure for sensor with actuator

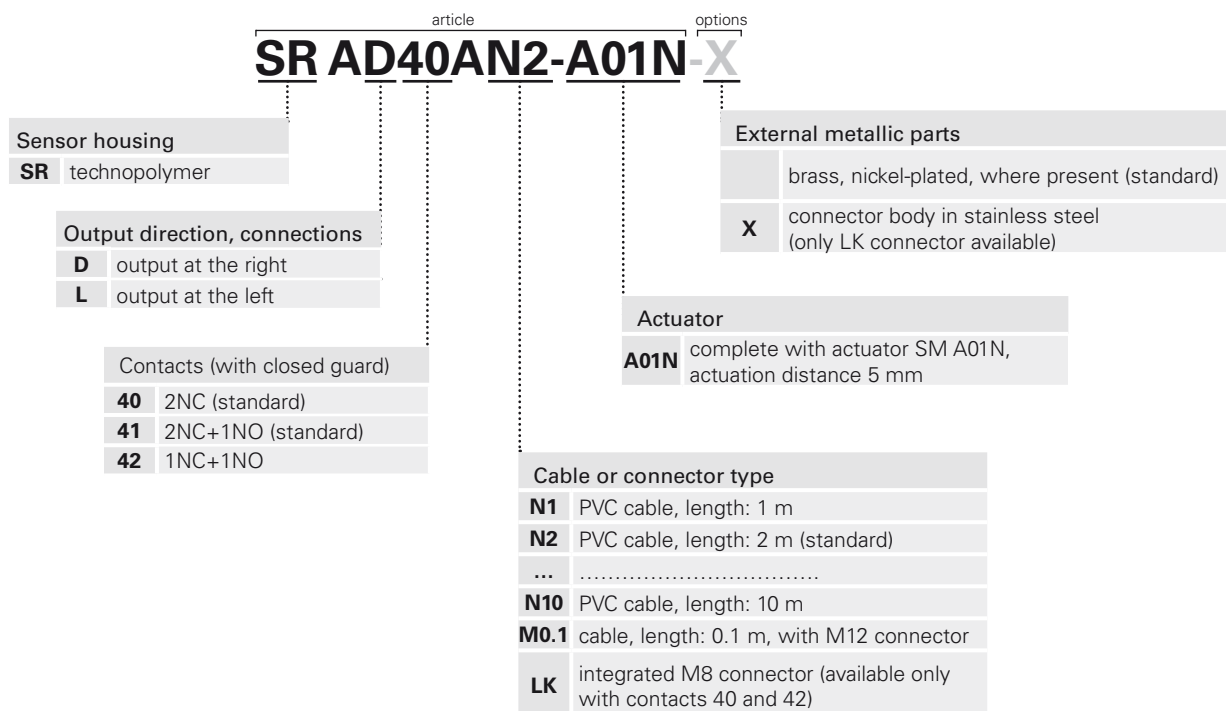

**Attention!** The feasibility of a code number does not mean the effective availability of a product. Please contact our sales office.

## Code structure for single sensor

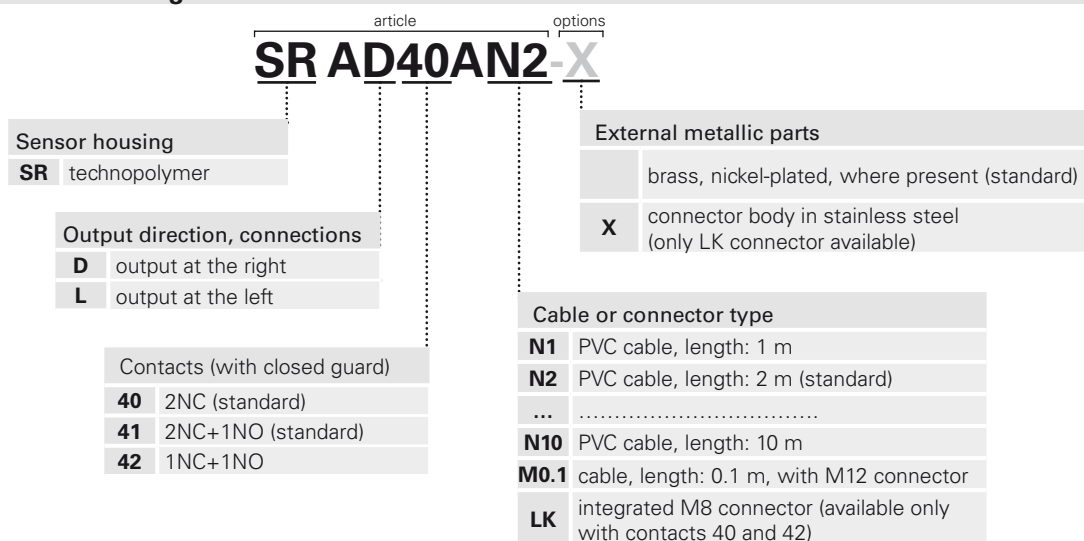


**Attention!** The feasibility of a code number does not mean the effective availability of a product. Please contact our sales office.

## Code structure for single actuator

**SM A01N**

Actuator	
<b>A01N</b>	actuation distance 5 mm

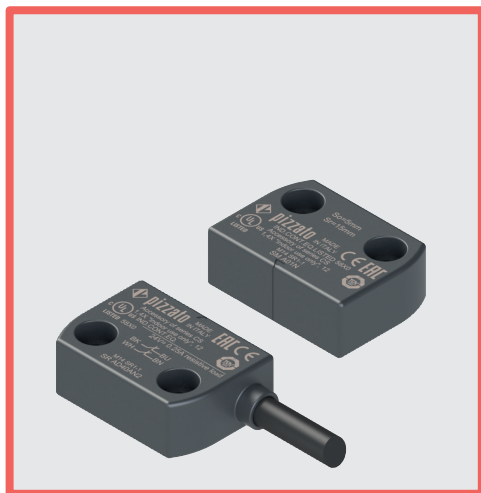

### Main features

- Actuation without mechanical contact
- Output contacts: 2NC, 1NO+2NC or 1NO+1NC
- Insensitive to dirt
- Protection degrees IP67 and IP69K
- Coded actuator
- Technopolymer housing
- Versions with M8 or M12 connector

### Quality marks:



UL approval: E496318  
TÜV SÜD approval: Z10 15 08 75157 008  
EAC approval: RU C-IT.AD35.B.00454

### Compliance with the requirements of:

Low Voltage Directive 2014/35/EU  
Machinery Directive 2006/42/EC  
EMC Directive 2014/30/EU.

### Technical data

#### Housing

Housing made of glass fibre reinforced technopolymer, self-extinguishing.  
Versions with integrated cable 4 x 0.34 mm<sup>2</sup> or 6 x 0.25 mm<sup>2</sup>, length 2 m, other lengths 0.5 m ... 10 m on request  
Versions with integrated M8 connector  
Versions with 0.1 m cable length and M12 connector, other lengths from 0.1 ... 3 m on request

Protection degree:

IP67 acc. to EN 60529  
IP69K acc. to ISO 20653  
(Protect the cables from direct high-pressure and high-temperature jets)

#### General data

For safety applications up to:

SIL 3 acc. to EN 62061  
PL e acc. to EN ISO 13849-1  
type 4 acc. to EN ISO 14119  
low acc. to EN ISO 14119  
20,000,000 (with compatible Pizzato Elettrica safety modules)  
400,000  
(at max. load: DC12 24 V 250 mA)

Interlock, no contact, coded:

Coding level:

Safety parameter B<sub>10d</sub>:

Service life:

Ambient temperature:

Ambient temperature with flexible installation cable:

Vibration resistance:

20 years  
-25°C ... +80°C  
-5°C ... +80°C  
10 gn (10 ... 150 Hz) acc. to IEC 60068-2-6  
30 gn; 11 ms acc. to EN 60068-2-27  
3  
0.8 ... 2 Nm

Shock resistance:

Pollution degree

Screw tightening torque:

#### In compliance with standards:

IEC 60947-1, EN 60947-1, IEC 60947-5-1, EN 60947-5-1, EN 60947-5-2, EN 60947-5-3 (in connection with safety module), EN ISO 14119, EN ISO 12100, EN ISO 13849-1, EN ISO 13849-2, IEC 60204-1, EN 60204-1, IEC 60529, EN 60529, ISO 20653, UL 508, CSA 22.2 No.14 .

#### Approvals:

UL 508, CSA 22.2 No.14 , EN ISO 13849-1, EN 60947-5-3, EN 50178, EN 61508-1, EN 61508-2, EN 61508-4, IEC 62061, EN 60947-1.

#### Actuation data

Assured operating distance S<sub>ao</sub>

Assured release distance S<sub>ar</sub>

Repeat accuracy

Switching frequency

Distance between two sensors

5 mm with actuator SM A01N  
15 mm with actuator SM A01N  
≤ 10%  
up to 150 Hz  
Min. 50 mm

#### Electrical data

Rated operating voltage U<sub>e</sub>:

Rated operating current I<sub>e</sub>:

Rated insulation voltage U<sub>i</sub>:

24 Vac/dc  
0.25 A (resistive load)  
120 Vac (with cable)  
60 Vac / 75 Vdc (with M8 connector)  
120 Vac (with M12 connector, 4-pole)  
30 Vac / 36 Vdc (with M12 connector, 8-pole)

Rated impulse withstand voltage (U<sub>imp</sub>):

6 kV  
1.5 kV (with connector)

Thermal current I<sub>th</sub>:

Maximum switching load:

Protection fuse:

Electrical endurance:

0.25 A  
6 W (resistive load)  
0.25 A type F  
1 million operating cycles

**⚠ If not expressly indicated in this chapter, for correct installation and utilization of all articles see chapter utilization requirements from page 313 to page 324.**

### Connection with safety modules for safety applications:

Connection with safety modules CS AR-01••••; CS AR-02••••; CS AR-04••••; CS AR-05••••; CS AR-06••••; CS AR-08••••; CS AR-46•024; CS AR-91••••; CS AT-0••••; CS AT-1••••; CS AT-3••••; CS FS-5••••; CS MF•••••; CS MP•••••.  
When connected to the safety module, the sensor can be classified as a control circuit device up to PDF-M (EN 60947-5-3).  
The system can be used in safety circuits up to PL e/SIL 3/category 4 in accordance with EN ISO 13849-1.

### Features approved by UL

Utilization categories: 24 Vdc, 0.25 A (resistive load).

Housing features type 1, 4X "indoor use only", 12.

Accessory for CS series.

In compliance with standard: UL 508, CSA 22.2 No.14

### Features approved by TÜV SÜD

Supply voltage: 24 Vac/dc

Rated operating current (max.): 0.25 A

Ambient temperature: -25°C ... +80°C

Protection degree: IP67

PL, category: PL e, category 4 with CS AR-08

In compliance with standards: 2006/42/EEC Machine Directive, EN ISO 13849-1:2008, EN 60947-5-3/A1:2005, EN 50178:1997, EN 61508-1:1998 (SIL 1-3), EN 61508-2:2000 (SIL 1-3), EN 61508-4:1998 (SIL 1-3), IEC 62061:2005 (SIL CL 3), EN 60947-1

Please contact our technical department for the list of approved products.

Please contact our technical department for the list of approved products.




## Description



Coded magnetic sensors are devices suitable for monitoring protections and guards of machines without inertia which, when linked to a safety module, can create a system with safety category up to SIL 3 according to EN 62061, up to PL e according to EN ISO 13849-1 and up to category 4 according to EN ISO 13849-1. These products consist of a sensor that detects the magnetic field and which is connected to the machine structure and of a coded magnetic actuator, which is connected to the movable guard. When the sensor and actuator are approached (closed guard), the sensor detects the actuator and actuates the electrical contacts. The sensor is designed to be activated only by the correct coded actuator and not through a common magnet.


## Insensitivity to dirt



Magnetic sensors are totally sealed and retain their safety characteristics also where dirt and dust are present (not ferromagnetic material).

This characteristic, combined with the design without recesses, makes them particularly suitable for use in the agricultural and food industries.


## Wide actuation range



With their built-in features, magnetic sensors have a wide actuation range, making them very well suited for applications with large tolerances or where mechanical properties change over time.


In this type of sensor, the actuation distances may vary depending on the shift direction of the actuator in relation to the sensor.

## Safety screws for actuators



As required by EN ISO 14119, the actuator must be fixed immovably to the door frame. Pan head safety screws with one-way fitting are available for this purpose. With this screw type, the actuators cannot be removed or tampered by using common tools. See accessories on page 310.


## Actuation from many directions



The coded magnetic sensors were designed to be activated by the respective actuator from various directions.

The customer therefore enjoys maximum flexibility when positioning devices along the perimeter of the guards.

## Laser engraving



All devices are marked using a dedicated indelible laser system. These engravings are therefore suitable for extreme environments too. Thanks to this system that does not use labels, the loss of plate data is prevented and a greater resistance of the marking is achieved over time.


## Protection degrees IP67 and IP69K

**IP69K**  
**IP67**

These devices are designed to be used in the toughest environmental conditions and they pass the IP67 immersion test acc. to EN 60529. They can therefore be used in all environments where maximum protection degree of the housing is required. Due to

their special design, these devices are suitable for use in equipment subjected to cleaning with high pressure hot water jets. These devices meet the IP69K test requirements according to ISO 20653 (water jets with 100 bar and 80°C).

## Compatible safety modules



well as high reliability.

These magnetic sensors have been checked and tested for operation with suitable safety modules (see list). The use of complete and tested solutions guarantees the electrical compatibility between the sensor and safety module, as

Sensors	Compatible safety modules	Safety module output contacts	
		Instantaneous contacts	Delayed contacts
SR AD40A●● SR AD41A●● SR AD42A●●	CS AR-01●●●● <sup>b</sup>	2NO+1NC	/
	CS AR-02●●●● <sup>b</sup>	3NO	/
	CS AR-04●●●● <sup>b</sup>	3NO+1NC	/
	CS AR-05●●●●	3NO+1NC	/
	CS AR-06●●●●	3NO+1NC	/
	CS AR-08●●●●	2NO	/
	CS AR-46●024	1NO	/
	CS AR-91●●●●	2NO+1PNP	/
	CS AT0●●●●●	2NO+1NO	2NO
	CS AT-1●●●●●	3NO	2NO
	CS AT-3●●●●●	2NO	1NO
	CS FS-5●●●●●	1NO+1NC+1CO	/
	CS MP●●●●●●●	see page 253	see page 255
	CS MF●●●●●●●	see page 281	see page 283


<sup>a</sup> Compatible with CS MF202●●-P4 and CS MP●●●●●●● only.

<sup>b</sup> Compatible with modules with production batch later than 04/2014 only. For features of the safety modules see page 191.

## Series connection of multiple sensors

The coded magnetic sensors can be connected in series with the only limitation that the overall resistance, of sensors and the related wiring, has to be not higher than the admitted max. value of the module, which typically is equal to 50 ohm (see module features). This is a very high value that, with normal wiring, allows the use of dozens of sensors without problems. It is also possible to realise mixed circuit solutions by connecting coded magnetic sensors in series to safety switches, with the only limitation being the above-mentioned maximum electrical resistance.

It should be noted that the series connection of two or more coded sensors reduces the self-monitoring capacity of the system, see ISO/TR 24119. The use of Pizzato Elettrica safety modules is recommended.

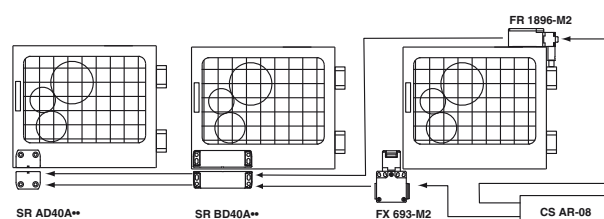


### Connection with safety modules

Connection with safety modules CS AR-05 or CS AR-06

Input configuration with manual start (CS AR-05) and monitored start (CS AR-06)


2 channels



Connection with safety module CS AR-08 or CS AT

Input configuration with manual start

2 channels

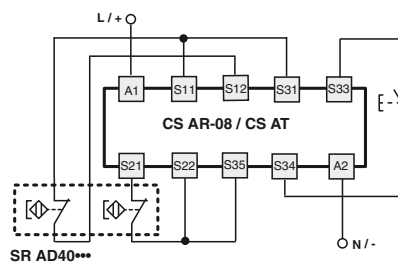


For features of the safety modules see page 191.

### Internal connections with cable

Contact states are displayed for closed guard

With cable (2NC)



With cable (1NC+1NO)



With cable (2NC+1NO)



### Internal connections with connector

Contact states are displayed for closed guard

With M12 connector (2NC+1NO)

With M12 connector (2NC)

With M12 connector (1NC+1NO)



With M8 connector (2NC)

With M8 connector (1NC+1NO)



Female connectors see page 287

### Operating distances SR AD.....A01N

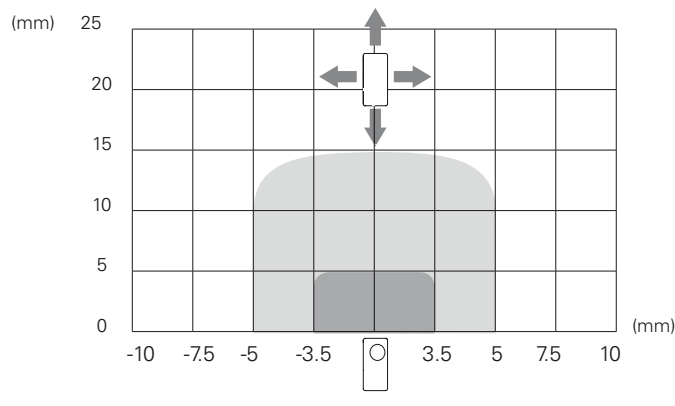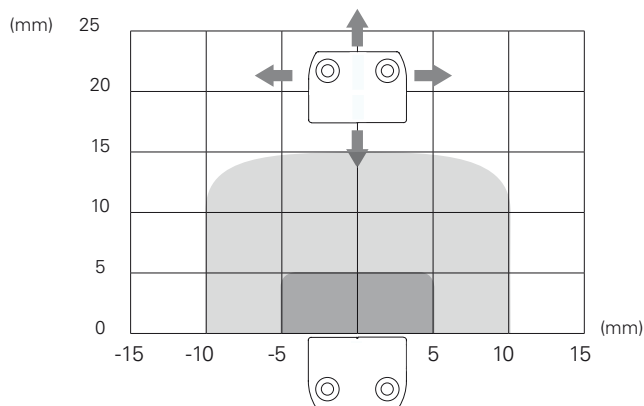

Legend:

Assured operating distance  $S_{ao}$

Assured release distance  $S_{ar}$

Note: The progress of the activation areas is for reference only



## Dimensional drawings

All values in the drawings are in mm

integrated cable, length: 2 m, at the right		integrated cable, length: 2 m, at the left	
SR AD40AN2	2NC	SR AL40AN2	2NC
SR AD41AN2	1NO+2NC	SR AL41AN2	1NO+2NC
SR AD42AN2	1NO+1NC	SR AL42AN2	1NO+1NC

coded actuator Low level of coding acc. to EN ISO 14119	
SM A01N	Actuation distance 5 mm


M8 connector, at the right	M8 connector, at the left	cable, length: 0.1 m, with M12 connector at the right	cable, length: 0.1 m, with M12 connector at the left
SR AD40ALK	2NC	SR AD40AM0.1	2NC
SR AD41ALK	1NO+1NC	SR AD41AM0.1	1NO+2NC
SR AD42ALK	1NO+1NC	SR AD42AM0.1	1NO+1NC
SR AL40ALK	2NC	SR AL40AM0.1	2NC
SR AL41ALK	1NO+1NC	SR AL41AM0.1	1NO+2NC
SR AL42ALK	1NO+1NC	SR AL42AM0.1	1NO+1NC

Items with code on **green** background are stock items

Accessories See page 299

→ The 2D and 3D files are available at [www.pizzato.com](http://www.pizzato.com)

## Spacer



This spacer is placed between the magnetic safety sensors and metal surfaces that can deflect the magnetic field: as a result, the activation and deactivation distances of the sensor remain the same. Because it is made out of a single block of material, it is especially well suited for applications where a high level of cleanliness is required, as any material present in the installation area cannot penetrate and accumulate.

Article	Description
VS SP1AA1	Spacer for SR A series sensors

## Use of coded magnetic sensors for safety applications


A coded magnetic sensor alone cannot be used for safety functions because its operating principles are not considered safe by the standards (such as the positive opening on mechanical switches).

For this reason, a magnetic sensor coded for use in safety applications must always be connected to a safety module with at least two channels that monitors the proper function.

## Limits of use

- Installation must be carried out by qualified staff only.
- Before commissioning and at regular intervals, the correct switching of the contacts and proper operation of the system, consisting of the sensor and the safety module, must be checked.
- Do not use a hammer for adjustment.
- Do not use the sensor as a mechanical stop.
- Observe the assured operating and release distances.
- Adhere to the EN ISO 14119 requirements regarding low level of coding for interlocks.
- Do not mount the sensor and actuator in strong magnetic fields.
- Keep away from iron filings.
- Avoid any impact with the sensor. Excessive shock and vibrations may affect the correct operation of the sensor.
- The actuator must not strike the sensor.
- In case of damages or wear, the entire device – including the actuator – must be replaced.
- Keep load under the value indicated in the electrical data.
- If the sensors are used without corresponding safety module, the protective fuse recommended in the electrical data must be connected in series to each sensor contact.
- Turn off the power supply before accessing the switch contacts, also during wiring.

### Installation on ferromagnetic material



- If possible do not mount the sensor and the actuator on ferromagnetic materials.
- To avoid a reduction in the switching distances, use the special VS SP1AA1 spacer.

### Assembly of multiple sensor-actuator systems

The minimum spacing between adjacent sensor-actuator systems must be at least 50 mm.

