



RFID Safety switch with solenoid NG series



NG series safety switches with solenoid and RFID technology

Description



These switches are used on machines where the hazardous conditions remain for a while, even after the machines have been switched off, for example because of mechanical inertia of pulleys, saw disks, parts under pressure or with high temperatures. They can also be used when it is necessary to control machine guards allowing the opening of protections only under specific conditions.



The mode 1 (active safety outputs with closed and locked guard) versions are considered interlocks with locking in accordance with ISO 14119, and the product is marked on the side with the symbol shown.


Connection of several switches in series

PL e+ SIL 3

One of the most relevant features of the NG line is the optional connection in series of several switches, up to a maximum number of 32 devices, while maintaining the maximum PL e safety level prescribed by the EN 13849-1 standard and the SIL 3 safety level according to the EN 62061 standard.

This connection method is permitted in safety systems which, at the end of the chain, feature a safety module evaluating the outputs of last NG switch.


The fact that the PL e safety level can be maintained even with 32 switches connected in series indicates the presence of an extremely safe structure inside each individual device.

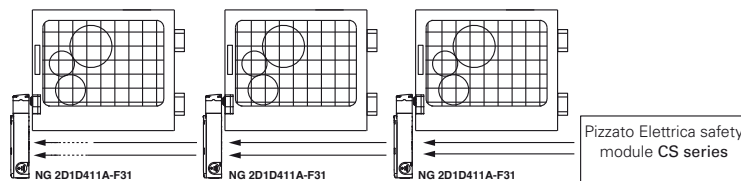

Series connection with other devices

PL e+ SIL 3

The NG series features two safe inputs and two safe outputs, which can be connected in series with other Pizzato Elettrica safety devices. This option allows the creation of safety chains containing various devices, for example the creation of circuits with connections in series, including stainless steel safety hinges (HX BEE1 series), transponder sensors (ST series) and door lock sensors (NG series), while maintaining maximum PL e and SIL 3 safety levels.

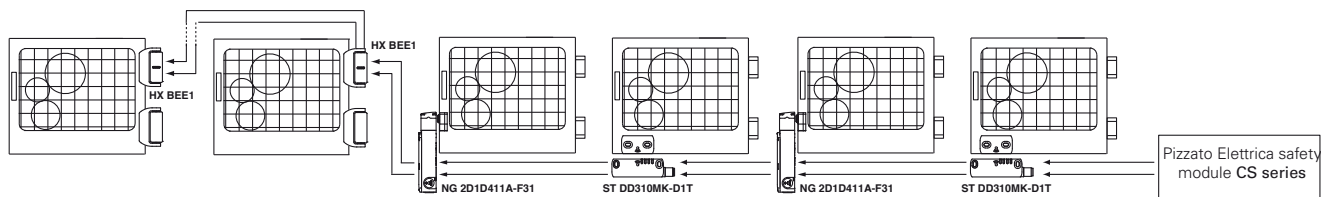


RFID actuators with high coding level




The NG series features an electronic system based on RFID technology to detect the actuator. This system gives a different coding to each actuator and makes it impossible to tamper with a device by using another actuator belonging to the same series. The actuators may have millions of different coding combinations, and are therefore classified as actuators with a high coding level, according to EN ISO 14119.

Holding force of the locked actuator




9750 N The sturdy interlocking system guarantees the actuator a maximum holding force F_{1max} of 9750 N. This is one of the highest values available on the market today, making this device suitable for severe heavy-duty applications.

Dustproof



The switch is provided with a through hole for inserting the actuator and, thanks to this peculiarity, any dust which may go inside the actuator hole can always come out of the opposite side instead of being left there. Moreover, the lock pin is provided with an external diaphragm gasket which makes it suitable for any environment where dust is present.


Built-in control devices



The switch is also available with a raised cover, which make it possible to install control devices and the related contact blocks on it, such as buttons, emergency buttons, signalling lights and selectors.


The result is a compact switch, whose control devices do not need any additional installation on a panel or on dedicated boxes. The devices can be illuminated and are easy to wire, thanks to the terminal blocks with PUSH-IN spring connection.

Centering



The switch is provided with a wide centering inlet for the actuator pin. Such solution makes it easier to align the actuator with the hole found in the head during the fitting stage. Moreover, this solution drastically reduces any probable collisions between the actuator and the switch, also allowing it to be fitted on inaccurate doors.

Push-in spring connections



The switch is provided with a PUSH-IN type spring connection system on the inside. This technology allows a very handy quick wiring procedure, since the wire just needs to be inserted into the appropriate hole in order to be secured and to establish the electrical connection. The said operation can be carried out without the help of any tool, but simply using rigid or flexible wires with wire-end sleeves. Release is obtained by pressing the appropriate wire-releasing button.




Six LEDs for immediate diagnosis



As the LEDs have been designed for quick immediate diagnosis, the status of each input and output is highlighted by one specific LED. This makes it possible to quickly identify the interruption points in the safe chain, which device is released, which door is opened and any errors inside the device. All that in a straightforward way without needing to decode complex blinking sequences.

Holding force of the unlocked actuator




The inside of each switch features a device which holds the actuator in its closed position. Ideal for all those applications where several doors are unlocked simultaneously, but only one is actually opened. The device keeps all the unlocked doors in their position with a retaining force of 30 N~, stopping any vibrations or gusts of wind from opening them.

Laser engraving



All the NG series switches are indelibly marked with a dedicated laser system that allows the marking to be also suitable for extreme environments. This system that does not use labels, prevents the loss of plate data and the marking is more resistant over time.

Key release device and emergency release button



The auxiliary lock release device is used to permit unlocking of the actuator only by personnel in possession of the key. It also works with no power supply and once actuated, prevents the guard from locking.

The emergency release button allows actuator release and immediate opening of the door. Generally used in machines

within which an operator could inadvertently become trapped, it faces towards the machine interior, to allow the operator to exit even in the event of a black out. Equipped with bistable function, it can be freely extended with suitable extensions (see accessories). Both these devices can be positioned on the four switch sides, thus allowing its installation both to the interior and to the exterior of the machine.


Two safety output actuation modes

**CLOSED
OR
CLOSED & LOCK**

for machines with inertia or safety outputs active with protection closed (mode 2) for machines without inertia.

The switch can be selected from two different safety output activation modes: safety outputs active with protection closed and locked (mode 1) for


Double anti-tampering safety



as they obstruct access to the tamper-proof screws.


Each NG series actuator is supplied with four stainless steel tamper-proof screws, for it to be fitted on the protection. Four protection insert caps are also supplied together with the screws. Besides preventing any deposit from building up and making it easy to clean the actuator, these caps help to prevent any tampering

Articulated joint for inaccurate doors




All the NG series actuators are jointed and allow the pin to match the centering hole of the switch. This way there is no need for precise actuator-switch aligning operations during the fitting stage. Moreover, thanks to its flexibility, this device can be used on doors with an activating range of 150 mm, without having to tilt the pin beforehand.

Orientable heads and devices



The head can be quickly oriented in four different directions after unscrewing the 4 fixing screws. Also the key release device and the emergency release button can be positioned in 90° steps, thus obtaining as many as 16 different configurations with the same article.

Not detachable head and devices



The head and the release device can be adjusted but cannot be detached from each other. This makes the switch more secure since the installer does not need to worry about how to assemble the various pieces, and the switch is less likely to become damaged (small parts being lost, dirt getting in etc.).

High protection degree

**IP69K
IP67**


These devices are designed to be used in the toughest environmental conditions and they pass the IP67 immersion test acc. to IEC 60529. They can therefore be used in all environments where the maximum protection of the housing is required. Special measures also allow devices to be used even in machines which are subjected to washing with high pressure warm water jets. In fact these devices pass the IP69K test according to ISO 20653, using jets of water to 100 atmospheres at a temperature of 80°C.

External device monitoring

EDM

On request we can supply the device with EDM (External Device Monitoring) function, so that the device itself can check the integrity of the relays connected to the safety outputs. These safety relays or safety contactors send a feedback signal to the EDM input, which verifies the consistency of the received signal with the safety outputs state.

Selection diagram

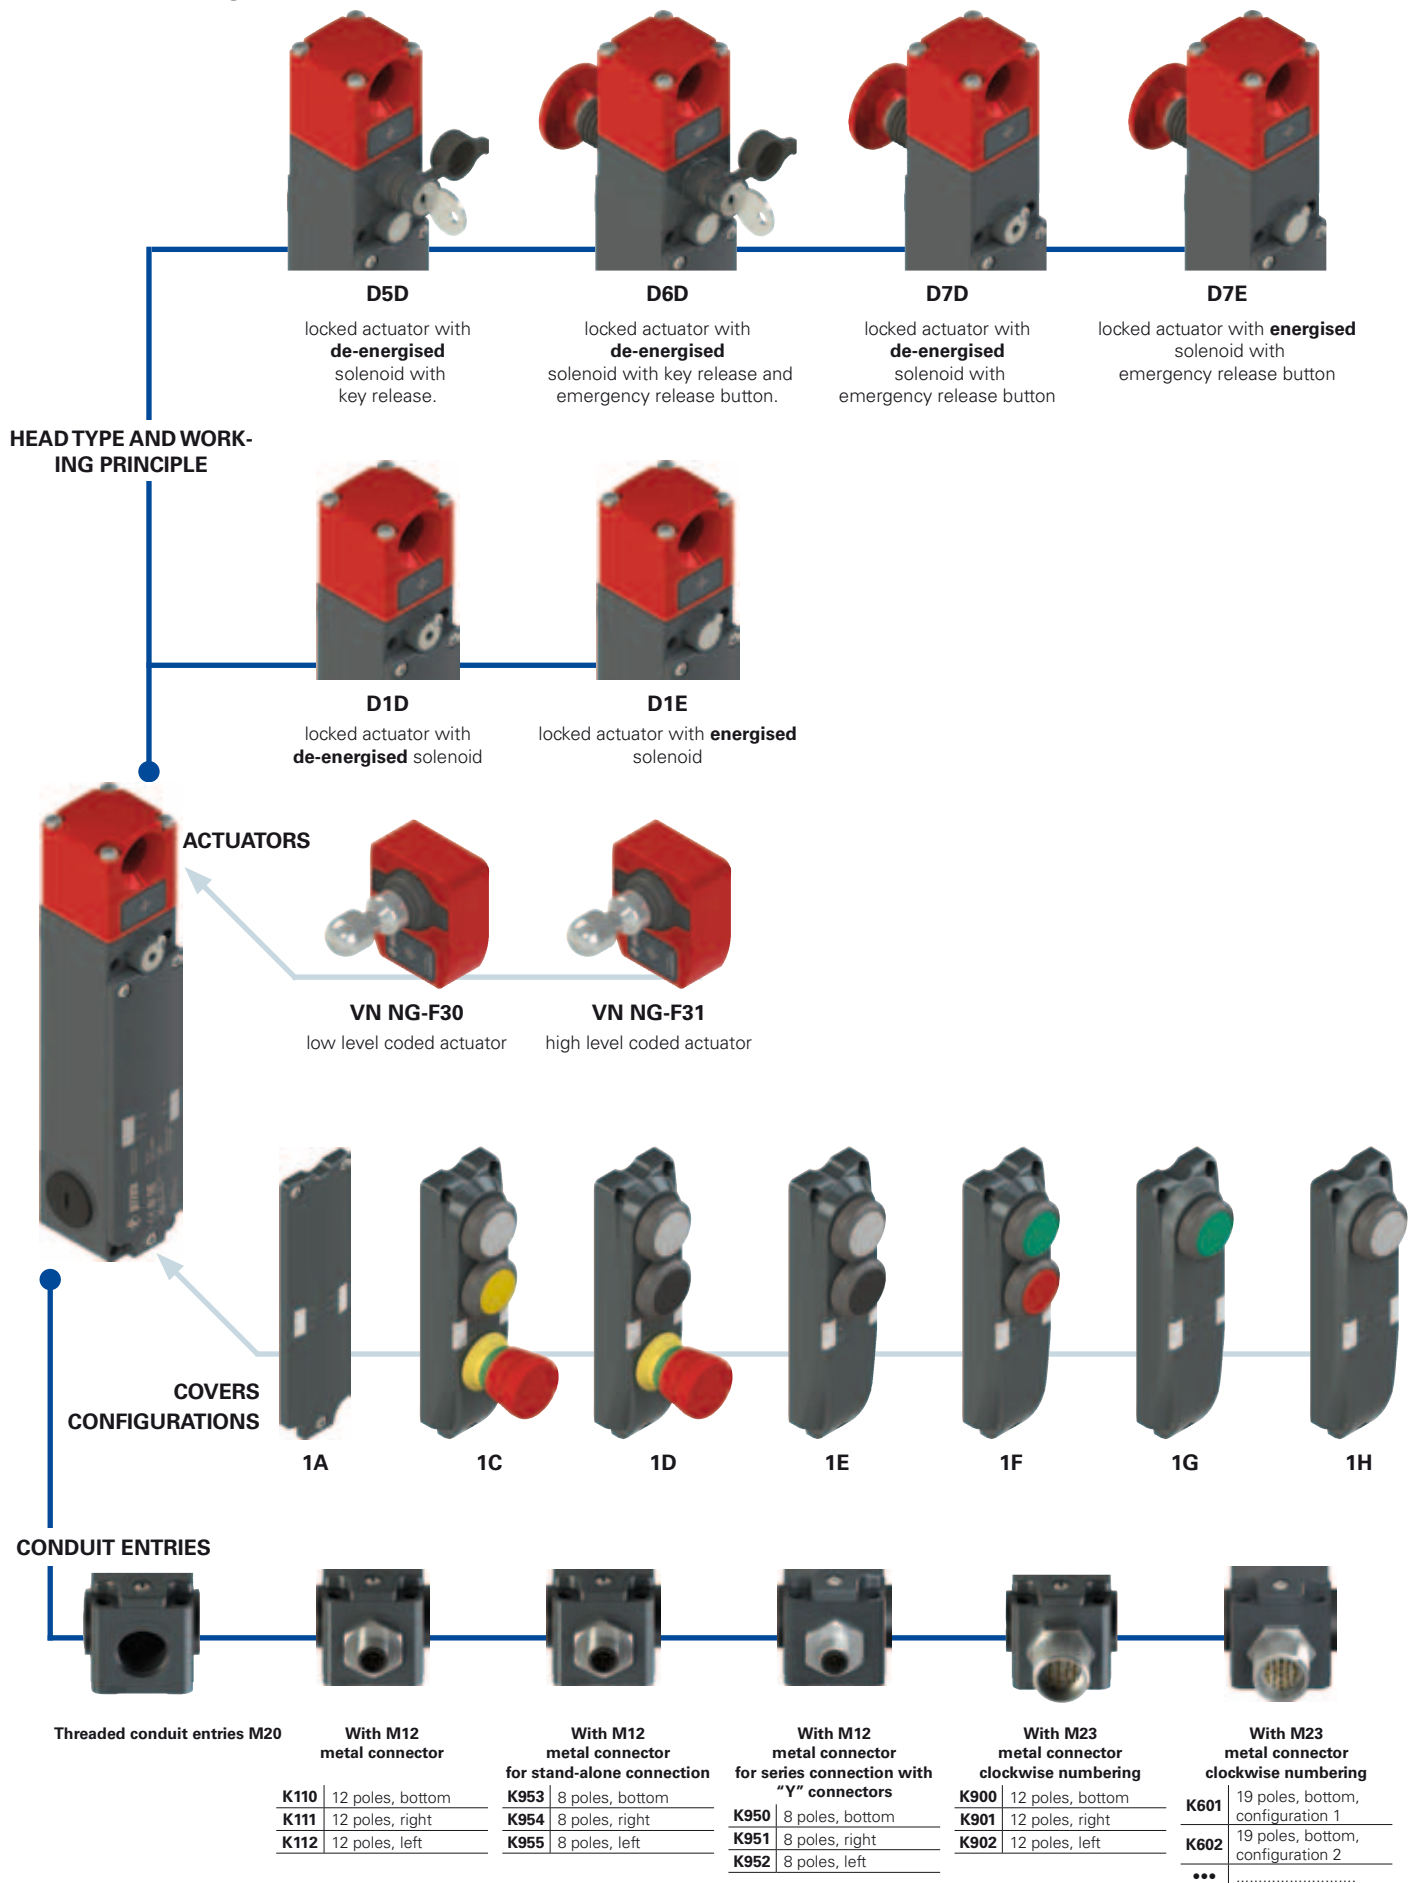

product options

accessory sold separately



Code structure

Attention! The feasibility of a code number does not mean the effective availability of a product. Please contact our sales office.

article options
NG 2D1D411A-F31E34K900LP30

Working principle

D1D	locked actuator with de-energised solenoid
D1E	locked actuator with energised solenoid
D5D	locked actuator with de-energised solenoid. With key release
D6D	locked actuator with de-energised solenoid. With key release and emergency release button
D7D	locked actuator with de-energised solenoid. With emergency release button
D7E	locked actuator with energised solenoid. With emergency release button

Release button length

	for wall thickness max. 15 mm (standard)
LP30	for wall thickness max. 30 mm
LP40	for wall thickness max. 40 mm
LP50	for wall thickness max. 50 mm
LP60	for wall thickness max. 60 mm
...	Other wall thicknesses on request

Preinstalled connectors

	without connector (standard)
K110	M12 metal connector, 12 poles, bottom
K601	connettore metallico M23 a 19 poli in basso, configuration 1
K900	M23 metal connector, 12 poles, bottom
K950	M12 metal connector, 8 poles, bottom, for series connection
K953	M12 metal connector, 8 poles, bottom, for stand-alone connection
...	other connectors on request

Inputs and outputs

3	2 safety inputs IS1, IS2 2 safety outputs OS1, OS2 1 signalling output O3: closed protection 1 signalling output O4: locked protection 1 solenoid activation input I4 The switch is only sold with its actuator
4	2 safety inputs IS1, IS2 2 safety outputs OS1, OS2 1 signalling output O3: closed protection 1 signalling output O4: locked protection 1 solenoid activation input I4 1 programming input I3
5	2 safety inputs IS1, IS2 2 safety outputs OS1, OS2 1 signalling output O3: closed protection 1 signalling output O4: locked protection 1 solenoid activation input I4 1 programming input I3 1 EDM input I5
6	2 safety inputs IS1, IS2 2 safety outputs OS1, OS2 1 signalling output O3: closed protection 1 signalling output FAULT O4 1 solenoid activation input I4 1 programming input I3

Activation of OS outputs

1	mode 1: OS safety outputs active with locked protection
2	mode 2: OS safety outputs active with closed protection

Actuator extraction force

	actuator extraction force 30 N (standard)
E34	actuator freely removable

Actuator

F30	low level coded actuator VN NG-F30 the switch recognises any type F30 actuator
F31	high level coded actuator VN NG-F31 the switch recognises one single actuator

Covers configurations


1A	standard cover
1C	cover with white button / yellow button / turn-to-release emergency button
1D	cover with white button / black button / turn-to-release emergency button
1E	cover with white button / black button
1F	cover with green button / red button
1G	cover with green button
1H	cover with white button

Actuator code structure

VN NG-F30

Actuator

F30	low level coded actuator the switch recognises any type F30 actuator
F31	high level coded actuator the switch recognises one single actuator

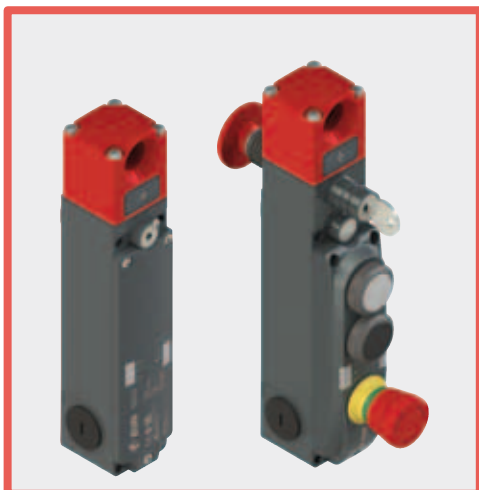

Main features

- Actuation without contact, using RFID technology
- Digitally coded actuator
- Actuator holding force 9750 N
- SIL 3 and PL e with a single device
- Optional built-in control devices
- Metal housing, three conduit entries M20
- Protection degrees IP67 and IP69K
- Versions with key release and emergency release button
- PL e also in series of up to 32 devices
- Signaling LED

Markings and quality marks:



UL approval: E131787
TÜV SÜD approval: Z10 15 01 75157 005
EAC approval: RU C-IT ДМ94.В.01024


In conformity with standards:

EN ISO 14119, EN 60947-5-3, EN 60947-1, IEC 60204-1, EN 60204-1, EN ISO 12100, IEC 60529, EN 60529, EN 61000-6-2, EN 61000-6-3, BG-GS-ET-19, IEC 61508-1, IEC 61508-2, IEC 61508-3, IEC 61508-4, SN 29500, EN ISO 13849-1, EN ISO 13849-2, EN 62061, EN 61326-1, EN 61326-3-1, EN 61326-3-2, ETSI 301 489-1, ETSI 301 489-3, ETSI 300 330-2, UL 508, CSA 22.2 No.14

In conformity with the requirements of:

Machinery Directive 2006/42/EC
EMC Directive 2014/30/CE
R&TTE Directive 1999/05/EC
FCC Part 15

Connection terminals

Connection system: PUSH-IN spring type
Cross-section of rigid wires and flexible wires with wire-end sleeve:
min. 1 x 0.34 mm² (1 x AWG 22)
max. 1 x 1.5 mm² (1 x AWG 16)
Wire cross-section with pre-insulated wire-end sleeve:
min. 1 x 0.34 mm² (1 x AWG 22)
max. 1 x 0.75 mm² (1 x AWG 18)
Cable stripping length (x): 
min.: 8 mm
max.: 12 mm

Technical data

Housing

Metal head and housing, baked powder coating.
Three threaded conduit entries:
Protection degree:

M20x1.5
IP67 acc. to EN 60529
IP69K acc. to ISO 20653
IP65 secondo EN 60529
with cable gland having equal or higher protection degree

Degree of protection with control devices:

General data

SIL level (SIL CL): up to SIL 3 acc. to EN 62061
Performance Level (PL): up to PL e acc. to EN ISO 13849-1
Safety category: up to cat. 4 acc. to EN ISO 13849-1
Interlock with lock, no contact, coded: type 4 acc. to EN ISO 14119
Level of coding acc. to EN ISO 14119 Low with F30 actuator
High with F31 actuator

Safety parameters:

MTTF_d: 1883 years
PFH_d: 8.07 E-10
DC: High
Ambient temperature: -20°C ... +50°C
Max. actuation frequency: 600 operating cycles¹/hour
with actuator lock and release: 1 million operating cycles¹
Mechanical endurance: 0.5 m/s
Max. actuation speed: 1 mm/s
Min. actuation speed: 9750 N acc. to EN ISO 14119
Maximum force before breakage F_{1max}: 7500 N acc. to EN ISO 14119
Max. holding force F_{zh}: 4 mm
Maximum play of locked actuator: 30 N
Released actuator extraction force:

(1) One operation cycle means two movements, one to close and one to open contacts, as defined in EN 60947-5-1.

Electrical data of inputs IS1/IS2/I3/I4/I5/EDM

Rated operating voltage U_{e1}: 24 Vdc
Rated current consumption: 5 mA

Electrical data of safety outputs OS1/OS2

Rated operating voltage U_{e1}: 24 Vdc
Output type: OSSD, PNP
Maximum current per output I_{e1}: 0.25 A
Minimum current per output I_{e1}: 0.5 mA
Utilization category: DC13; U_e=24 Vdc, I_e=0.25 A
Short circuit detection: Yes
Protection against overcurrent: Yes
Internal self-resetting protection fuse: 1.1 A
Duration of the deactivation impulse at the safety outputs: < 300 µs
Permissible maximum capacitance between outputs: < 200 nF
Permissible maximum capacitance between output and ground: < 200 nF

Electrical data of signaling output O3/O4

Rated operating voltage U_{e1}: 24 Vdc
Output type: PNP
Maximum current per output I_{e1}: 0.1 A
Utilization category: DC12; U_e=24 Vdc, I_e=0.1 A
Short circuit detection: No
Protection against overcurrent: Yes
Internal self-resetting protection fuse: 1.1 A

RFID sensor data

Assured operating distance S_{ao}: 2 mm
Assured release distance S_{ar}: 4 mm (actuator not locked)
10 mm (locked actuator)
Rated operating distance S_n: 2.5 mm
Repeat accuracy: ≤ 10 % S_n
Differential travel: ≤ 20 % S_n
Max. switching frequency: 1 Hz

Electrical data

Rated operating voltage U_e: 24 Vdc ±10% SELV
Operating current at voltage U_e:
- minimum: 40 mA
- with activated solenoid: 0.4 A
- with activated solenoid and all outputs at maximum power: 1.2 A
Rated insulation voltage U_i: 32 Vdc
Thermal current I_{th}: 0.25 A
Rated impulse withstand voltage U_{imp}: 1.5 kV
External protection fuse: 1.5 A / 1.6 A type F or equivalent device
Overvoltage category: III
Electrical endurance: 1 million operating cycles
Solenoid duty cycle: 100% ED
Solenoid consumption: 9 W



Characteristics approved by UL

Utilization categories: 24 Vdc, 0.25 A (resistive load).

Inputs supplied by remote class 2 source or limited voltage and limited energy.

In conformity with standard: UL 508, CSA 22.2 No.14

Please contact our technical service for the list of approved products.

Characteristics approved by TÜV SÜD

Protection degree: IP67, IP69K

Ambient temperature: -20°C ... +50°C

Storage temperature: -40°C ... +75°C







PL, category: PL e, Cat. 4.


SIL: SIL 3 / SIL CL 3

In conformity with standards: 2006/42/EC, EN 60947-1/A1:2011, EN 60947-5-2/A1:2012, EN 60947-5-3:2013, EN ISO 14119:2013, EN 61508-1:2010 (SIL 3), EN 61508-2:2010 (SIL 3), EN 61508-3:2010 (SIL 3), EN 61508-4:2010 (SIL 3), EN 62061/A1:2013 (SIL CL 3), EN ISO 13489-1:2008 (PL e, Cat 4).

Please contact our technical service for the list of approved products.







Selection table for switches with actuators




	Working principle D, with sealable auxiliary release device	Working principle E	Working principle D, with key release	Working principle D, with key release and emergency release button	Working principle D, with emergency release button and sealable auxiliary release device	Working principle E, with emergency release button
Mode 1  OS safety outputs active with locked and closed protection	NG 2D1D411A-F31	NG 2D1E411A-F31	NG 2D5D411A-F31	NG 2D6D411A-F31	NG 2D7D411A-F31	NG 2D7E411A-F31
Mode 2 OS safety outputs active with closed protection	NG 2D1D421A-F31	NG 2D1E421A-F31	NG 2D5D421A-F31	NG 2D6D421A-F31	NG 2D7D421A-F31	NG 2D7E421A-F31

To purchase a product with EDM input replace number 4 with number 5 in the codes shown above. Example: NG 2D1D411A-F31 → NG 2D1D511A-F31

Switch selection table




	Working principle D, with sealable auxiliary release device	Working principle E	Working principle D, with key release	Working principle D, supplied with key release and emergency release button	Working principle D, with emergency release button and sealable auxiliary release device	Working principle E, with emergency release button
Mode 1  OS safety outputs active with locked and closed protection	NG 2D1D411A	NG 2D1E411A	NG 2D5D411A	NG 2D6D411A	NG 2D7D411A	NG 2D7E411A
Mode 2 OS safety outputs active with closed protection	NG 2D1D421A	NG 2D1E421A	NG 2D5D421A	NG 2D6D421A	NG 2D7D421A	NG 2D7E421A

To purchase a product with EDM input replace number 4 with number 5 in the codes shown above. Example: NG 2D1D411A → NG 2D1D511A

Legend:  interlock with lock monitoring in accordance with EN ISO 14119

Actuator selection table



Level of coding acc. to EN ISO 14119	Article
low	VN NG-F30
high	VN NG-F31

The use of RFID technology in NG series devices makes them suitable for several applications. Pizzato Elettrica offers two different versions of actuators, in order to best suit customers' specific needs.

Type F30 actuators are all encoded with the same code. This implies that a device associated with an actuator type F30 can be activated by other actuators type F30.


Type F31 actuators are always encoded with different codes. This implies that a device associated with an actuator type F31 can be activated only by a specific actuator. Another F31 type actuator will not be recognised by the device until a new association procedure is carried out (reprogramming). After reprogramming, the old actuator F31 will no longer be recognized.

Items with code on green background are stock items

NG series safety switches with solenoid and RFID technology


Complete safety system

The use of complete tested solutions means that the customer can be certain of the electrical compatibility between the NG series switch and Pizzato Elettrica safety modules, thus ensuring greater reliability. In fact, these sensors have been tested for operation with the modules specified in the table shown on the side.

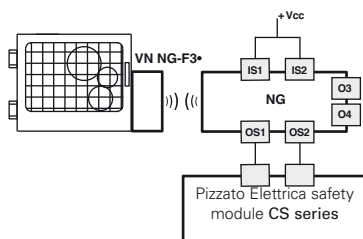


Switches	Compatible safety modules	Safety module output contacts		
		Instantaneous safety contacts	Delayed safety contacts	Signalling contacts
NG 2●●●●●●	CS AR-05●●●●	3NO	/	1NC
	CS AR-06●●●●	3NO	/	1NC
	CS AR-08●●●●	2NO	/	/
	CS AT-0●●●●●	2NO	2NO	1NC
	CS AT-1●●●●●	3NO	2NO	/
	CS MP●●●●●●	page 243 - CATALOGUE SAFETY 2015/16		
	CS MF●●●●●●	page 271 - CATALOGUE SAFETY 2015/16		

The NG series switch can be used individually, prior evaluation of the safe outputs by means of a Pizzato Elettrica safety module (see table for safety modules to be combined).

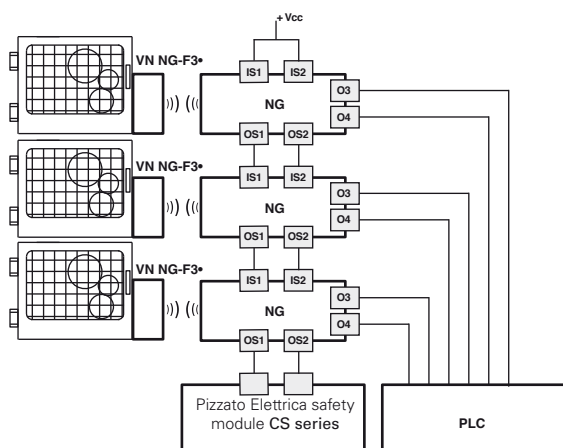


Possible connection in series of several switches in order to simplify the safety system wiring, after evaluating the outputs from the last switch in the chain by means of a Pizzato Elettrica safety module (table for safety modules to be combined). Each NG series switch is provided with two signalling outputs which are activated when the guard is closed (O3) or locked (O4). This piece of information can be managed by a PLC, depending on the specific requirements of the system installed.

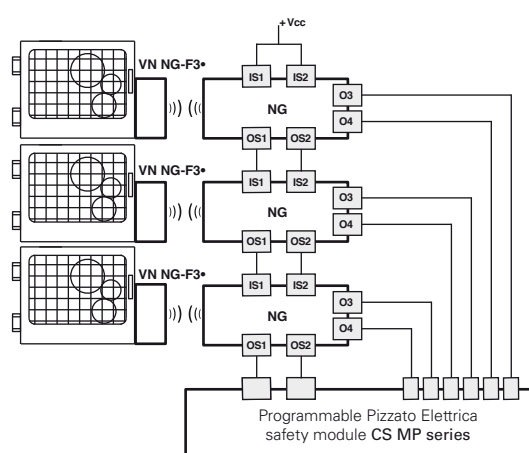

Possible connection in series of several switches in order to simplify the safety system wiring, after evaluating the outputs from the last switch in the chain by means of a safety module from Pizzato Elettrica CS MP series, which allows management of both safety and signalling functions.

The examples listed above refer to applications with NG 2●●●4●●●.

Internal diagram

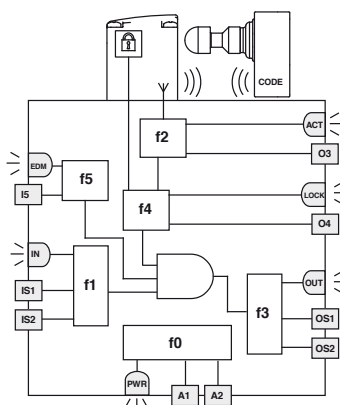

The diagram on the side represents the 6 logic functions which interact inside the device.

Function f0 is a global function which deals with the device power supply and the internal tests which it cyclically undergoes. The task of function f1 is to evaluate the status of the device inputs, whereas function f2 checks the presence of the actuator inside the switch operating areas.

Function f4 checks the actuator lock condition.


Function f3 is intended to activate or deactivate the safety outputs and check for any faults or short circuits in the outputs.

In the EDM versions, the f5 function verifies the consistency of the EDM signal during safety output state changes. The macro-function, which controls the above mentioned functions, enables the safety outputs only in the presence of active inputs, of the actuator within the safe zone, and where locking of the actuator has taken place, for mode 1 switches. For mode 2 switches, the safety outputs enable only in the presence of active inputs and with the actuator within the safe zone. The status of each function is displayed by the corresponding LED (PWR, IN, OUT, ACT, LOCK, EDM), in such a way that the general device status becomes immediately obvious to the operator.

LED	Function
PWR	power supply/self-diagnosis
IN	status of safety inputs
OUT	status of safety outputs
ACT	actuator state
LOCK	actuator locked
EDM	state of EDM inputs (NG 2D●●5●●●)



Actuation sequence in mode 1

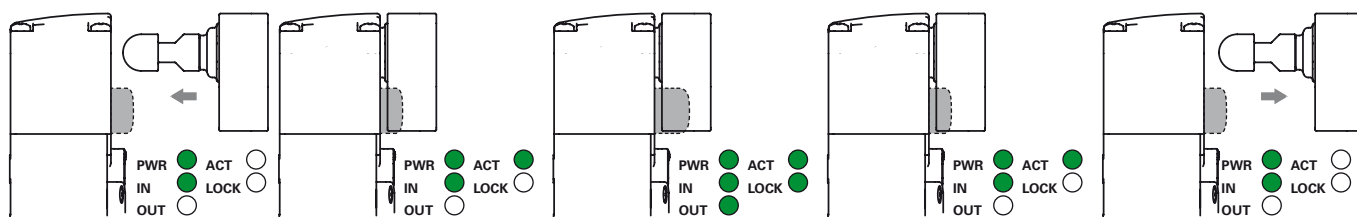

The switch is supplied with power (PWR LED on, green), the IS1 and IS2 inputs are enabled (IN LED on, green), the OS1 and OS2 safety outputs are disabled (OUT LED off). The actuator is on the outside of the activation zone (LED ACT off).

When the actuator is brought inside the safe activation area (dark grey area), the switch turns on the ACT LED (green). In this position, the O3 door-closed signalling output is activated. The actuator is not locked (LOCK LED off).

The I4 input can be used to lock the actuator (LOCK LED on, green). The OS1 and OS2 safety outputs are enabled (OUT LED on, green). The O4 signalling output is activated at the same time. The safe activation area is extended in order to allow greater play for the actuator.

The I4 input can be used to unlock the actuator (LOCK LED off). The switch disables the OS1 and OS2 safety outputs and turns off the OUT LED. The O4 signalling output is deactivated at the same time. The safe activation area returns to the initial values.

When the actuator leaves the activation limit area, the device turns off the ACT LED and the O3 signalling output.

Actuation sequence in mode 2


In contrast to the above mode 2 description, the safety outputs OS1 and OS2 enable when the actuator is detected, and disable when the actuator is no longer detectable.

Operating states

PWR LED	IN LED	OUT LED	ACT LED	LOCK LED	EDM LED (a)	Device status	Description
○	○	○	○	○	○	OFF	Device switched off.
●	●	●	●	●	●	POWER ON	Internal tests upon activation.
●	○	○	*	*	●	RUN	Safety inputs of the device not active.
●	●	*	*	*	*	RUN	Activation of safety inputs.
●	●	○	*	*	*	RUN	State of the safety inputs not coherent. Recommended action: check for presence and/or wiring of inputs.
●	*	*	●	*	*	RUN	Actuator in safe area. O3 signalling output active.
●	*	*	●	●	○	RUN	Actuator in safe area and locked; O3 and O4 outputs active.
●	●	●	●	●	○	RUN	Mode 1 Activation of safety inputs IS1, IS2. Actuator in safe area and locked. O3, O4, OS1 and OS2 outputs active.
●	●	●	●	*	○	RUN	Mode 2 Activation of safety inputs IS1, IS2. Actuator in safe area. O3, OS1 and OS2 outputs active.
●	*	●	*	*	*	ERROR	Error on safety outputs. Recommended action: check for any short circuits between the outputs, outputs and ground or outputs and power supply, then restart the device.
●	○	○	●	○	○	ERROR	Actuator detection error. Check for physical integrity of the device, if faulty replace the entire device. If undamaged, realign the actuator with the switch and restart the device.
●	○	○	○	○	○	ERROR	Internal error. Recommended action: restart the device. If the fault persists, replace the device.
●	*	○	*	*	●	RUN	EDM signal active (external relay off) ^a
●	●	●	●	●	○	RUN	EDM signal not active (external relay on) ^a
●	○	○	○	○	●	ERROR	Error in function EDM ^a


Legend: ○ = off ● = on ● = blinking ● = alternating colours * = indifferent (a) Available only in versions NG 2D●●5●1A

External device monitoring (EDM)



The NG 2D●●5●● version, in addition to maintaining the operating and safety characteristics of the NG series, allows control of **forcibly guided NC contacts of contactors or relays** controlled by the safety outputs of the switch itself. As an alternative to the relays or contactors you can use Pizzato Elettrica expansion modules CS ME-03. See page 235 - CATALOGUE SAFETY 2015/16. This check is carried out via the EDM input (External Device Monitoring as defined in EN 61496-1) of the switch.

contactors you can use Pizzato Elettrica expansion modules CS ME-03. See page 235 - CATALOGUE SAFETY 2015/16. This check is carried out via the EDM input (External Device Monitoring as defined in EN 61496-1) of the switch.

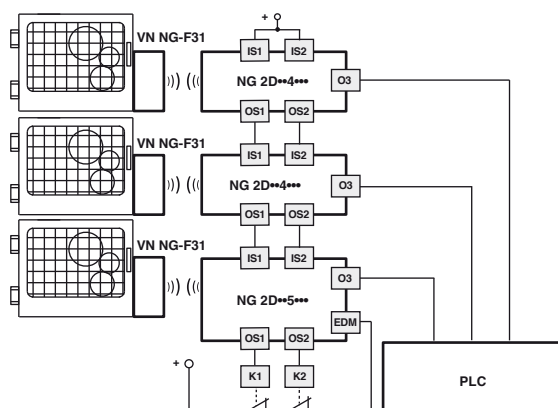


This version, with the IS safety inputs, **can be used at the end of a series of NG switches, up to a maximum number of 32 devices**, while maintaining the maximum PL e safety level and acc. to EN ISO 13849-1 and SIL 3 safety level acc. to EN 62061.

This solution allows you to dispense with the safety module connected to the last device in the chain.

Connection with safety modules


Connection with safety modules CS AR-08••••

Input configuration with monitored start
2 channels / Category 4 / up to SIL 3 / PL e




Connection with safety modules CS AR-05•••• / CS AR-06••••

Input configuration with manual start (CS AR-05••••)
or monitored start (CS AR-06••••)
2 channels / Category 4 / up to SIL 3 / PL e




Connection with safety modules CS AT-0••••• / CS AT-1•••••

Input configuration with monitored start
2 channels / Category 4 / up to SIL 3 / PL e



Connection with safety modules CS MF•••••, CS MP•••••

The connections vary according to the program of the module
Category 4/ up to SIL 3 / PL e

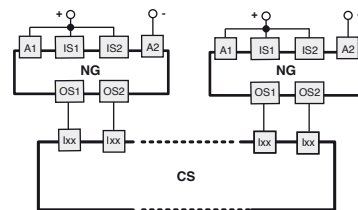







Internal connections (standard cover version NG 2D••••1A)

Internal terminal strip	M23 connector 12 poles	M12 connector 12 poles	M12 connector 8 poles stand-alone connection	M12 connector 8 poles series connection with "Y" connectors	Connection
A2	3	3	3	3	A2 0 V supply input
B2	3	3	3	3	B2 0 V auxiliary supply output
I4	10	10	8	8	I4 Solenoid activation input
O3	5	5	2	/	O3 Signalling output, actuator inserted
O4	9	9	5	5	O4 Signalling output, actuator inserted and locked (b)
I3	8	8	6	/	I3 Actuator programming input
A1	1	1	1	1	A1 +24 Vdc supply input
B1	1	1	1	1	B1 Auxiliary supply output +24 Vdc, (Ith 8 A max)
IS1	2	2	/	2	IS1 Safety input
IS2	6	6	/	6	IS2 Safety input
I5	11	11	/	/	I5 EDM input (a)
OS1	4	4	4	4	OS1 Safety output
OS2	7	7	7	7	OS2 Safety output

Important: terminals 7, 8, 9, 17, 18 of the internal terminal strip cannot be used.

(a) Available only in version NG 2D••••5••••.

(b) For NG 2D••••6•••• the output signals the device FAULT condition.

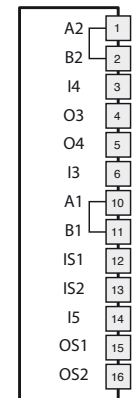

NG series safety switches with solenoid and RFID technology

Switch with built-in control devices to be wired

NG 2D••••1C			
Description	Colour actuator	Terminals	
illuminated light button 1NO+1NC	white	19 21 31	
illuminated light button 1NO+1NC	yellow	20 22 34	
turn-to-release, non-illuminated emergency button 2NC	red	23 25 32	
		24 26 34	
		27 29	
		28 30	

NG 2D••••1D			
Description	Colour actuator	Terminals	
illuminated light button 1NO+1NC	white	19 21 31	
non-illuminated light button 1NO+1NC	black	20 22 34	
turn-to-release, non-illuminated emergency button 2NC	red	23 25 32	
		24 26	
		27 29	
		28 30	

NG 2D••••1E			
Description	Colour actuator	Terminals	
illuminated light button 1NO+1NC	white	19 21 31	
non-illuminated light button 1NO+1NC	black	20 22 34	
		23 25	
		24 26	

NG 2D••••1F			
Description	Colour actuator	Terminals	
illuminated light button 1NO+1NC	green	19 21 31	
illuminated light button 1NO+1NC	red	20 22 34	
		23 25 32	
		24 26 34	

NG 2D••••1G			
Description	Colour actuator	Terminals	
illuminated light button 1NO+1NC	green	19 21 31	
		20 22 34	

NG 2D••••1H			
Description	Colour actuator	Terminals	
illuminated light button 1NO+1NC	white	19 21 31	
		20 22 34	

Internal wiring (version with built-in control devices)

N°Terminals		Connection	
1	A2	0 V supply input	
2	B2	0 V auxiliary supply output	
3	I4	Solenoid activation input	
4	O3	Signalling output, actuator inserted	
5	O4	Signalling output, actuator inserted and locked (b)	
6	I3	Actuator programming input	
10	A1	+24 Vdc supply input	
11	B1	Auxiliary supply output +24 Vdc, (Ith 8 A max)	
12	IS1	Safety input	
13	IS2	Safety input	
14	I5	EDM input (a)	
15	OS1	Safety output	
16	OS2	Safety output	


Important: terminals 7, 8, 9, 17, 18 of the internal terminal strip cannot be used.

(a) Available only in version NG 2D••5•••.


(b) For NG 2D••6••• the output signals the device FAULT condition.

19	Contact	1	Device 1
20	Contact	2	
21	Contact	1	Devices 2
22	Contact	2	
23	Contact	1	Devices 3
24	Contact	2	
25	Contact	1	Devices 3
26	Contact	2	
27	Contact	1	Devices 3
28	Contact	2	
29	Contact	1	Devices 3
30	Contact	2	
31	+24 Vdc supply input / LED Device 1		
32	+24 Vdc supply input / LED Device 2		
33	+24 Vdc supply input / LED Device 3		
34	0 V supply input / LED		





NG 2D••••1C
NG 2D••••1D



NG 2D••~1E
NG 2D••~1F



NG 2D••~1G
NG 2D••~1H





Switch with built-in control devices to be wired with M23 metal connector, 19 poles

NG 2D••••1C-K603

	Description	Colour actuator	n° pin
	illuminated light button 1NO	white	17 18 E- 18 6 19
	illuminated light button 1NO	yellow	15 16 E- 16 6 19
	turn-to-release, non-illuminated emergency button 2NC	red	10 13 11 14

NG 2D••••1D-K603

	Description	Colour actuator	n° pin
	illuminated light button 1NO	white	17 18 E- 18 6 19
	non-illuminated light button 1NO	black	15 16 E- 16 6 19
	turn-to-release, non-illuminated emergency button 2NC	red	10 13 11 14

NG 2D••••1E-K602

	Description	Colour actuator	n° pin
	illuminated light button 1NO	white	17 18 E- 18 6 19
	non-illuminated light button 1NO	black	15 16 E- 16 6 19

NG 2D••••1F-K602

	Description	Colour actuator	n° pin
	illuminated light button 1NO	green	17 18 E- 18 6 19
	illuminated light button 1NO	red	15 16 E- 16 6 19

NG 2D••••1G-K601

	Description	Colour actuator	n° pin
	illuminated light button 1NO	green	17 18 E- 18 6 19

NG 2D••~1H-K601

	Description	Colour actuator	n° pin
	illuminated light button 1NO	white	17 18 E- 18 6 19


Internal wiring (version with built-in control devices)

Connettore M23 a 19 poli	Connection
19	A2 0 V supply input
19	B2 0 V auxiliary supply output
1	I4 Solenoid activation input
8	O3 Signalling output, actuator inserted
9	O4 Signalling output, actuator inserted and locked (b)
7	I3 Actuator programming input
6	A1 +24 Vdc supply input
6	B1 Auxiliary supply output +24 Vdc, (lth 8 A max)
2	IS1 Safety input
3	IS2 Safety input
12	I5 EDM input (a)
4	OS1 Safety output
5	OS2 Safety output


Important: terminals 7, 8, 9, 17, 18 of the internal terminal strip cannot be used.

(a) Available only in version NG 2D••5•••.


(b) For NG 2D••6••• the output signals the device FAULT condition.

17	Contact 1	Device 1	
6	Contact 2		
/	Contact 1	Devices 2	
/	Contact 2		
15	Contact 1	Devices 3	
6	Contact 2		
/	Contact 1		
/	Contact 2		
10	Contact 1		
11	Contact 2		
13	Contact 1		
14	Contact 2		
18	+24 Vdc supply input / LED Device 1		
16	+24 Vdc supply input / LED Device 2		
/	+24 Vdc supply input / LED Device 3		
19	0 V supply input / LED		


NG 2D••~1C-K603
NG 2D••~1D-K603

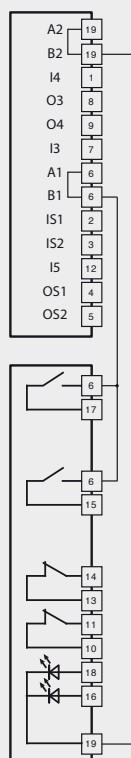

NG 2D••~1E-K602
NG 2D••~1F-K602

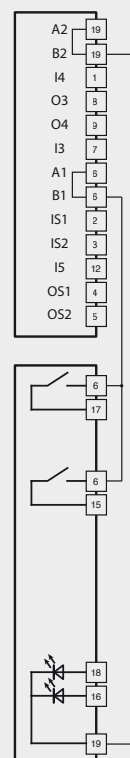

NG 2D••~1G-K601
NG 2D••~1H-K601

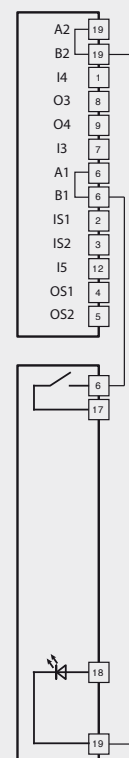


NG series safety switches with solenoid and RFID technology

Dimensional drawings

All measures in the drawings are in mm

Switches NG 2D..... with built-in control devices

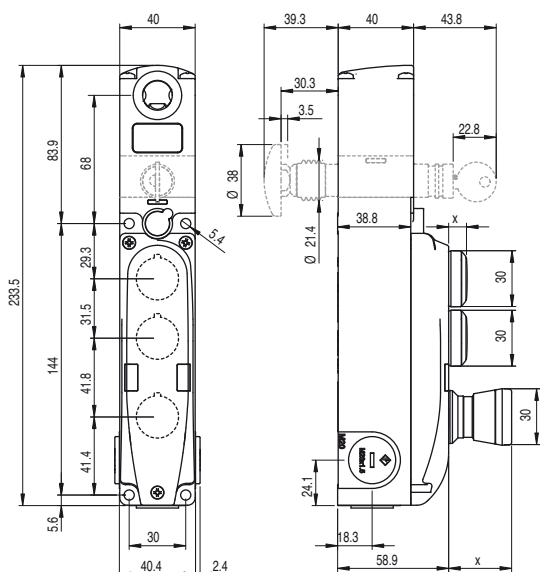

Available built-in control devices

	Description	Colour	Contacts	Size (x)
	Illuminated light button	white, red, green, yellow, blue	1NO+1NC or 1NO	10
	Non-illuminated light button	black	1NO+1NC or 1NO	10
	Indicator lights	white, red, green	/	9.7
	Emergency buttons with rotary release according to EN ISO 13850	red	2NC	33.4
	Illuminated selector switch with handle, 2 stable positions	black with transparent lens for LED	1NO+1NC or 1NO	23.8
	Key selector switch, 2 stable positions	black	1NO+1NC or 1NO	without key 25.5 with key 45.1

Legend: Maintained Spring-return Key extraction position

Other devices and contacts are available on request.

Please contact our technical service for the list of available products.

Technical features of built-in control devices

Housing

Protection degree:	IP65 secondo EN 60529
Mechanical endurance:	
Spring-return button:	1 million operating cycles
Emergency buttons:	50,000 operating cycles
Selector:	300,000 operating cycles
Key selector:	50,000 operating cycles
	30,000 operating cycles with key extraction

Actuating force:

Spring-return button:	4 N min	100 N max
Emergency buttons:	20 N min	100 N max
Selector:	0.1 Nm min	1.5 N max
Key selector:	0.1 Nm min	1.3 N max

Contact blocks of built-in control devices

Contact material:	silver contacts
Contact design:	self-cleaning contacts with double support point

Electrical data:

Thermal current (I_{th}):	1 A
Rated insulation voltage (U_i):	32 Vac/dc
Rated impulse withstand voltage (U_{imp}):	1.5 kV
LED Rated operating voltage:	24 Vdc \pm 15%
LED Rated operating current:	10 mA each LED

Utilization category:

Direct current: DC13
U_e (V) 24
I_e (A) 0.55

In conformity with standards:


IEC 60947-5-1, IEC 60947-5-5, EN ISO 13850

⚠ Installation for safety applications:

Always connect the safety circuit to the **NC contacts** (normally closed contacts) as stated in standard EN 60947-5-1, encl. K, par. 2.

Extensions for release button

Article	Description	Drawing
VN NG-LP30	Metal extension for release button. For max. wall thickness of 30 mm	
VN NG-LP40	Metal extension for release button. For max. wall thickness of 40 mm	
VN NG-LP50	Metal extension for release button. For max. wall thickness of 50 mm	
VN NG-LP60	Metal extension for release button. For max. wall thickness of 60 mm	

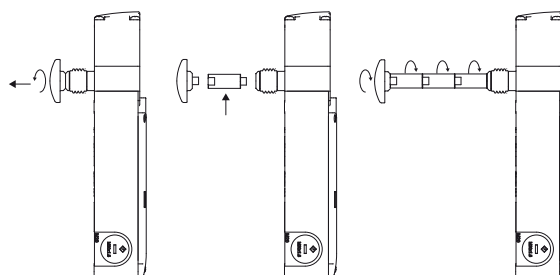

Metal extensions can be combined together until the required length is obtained. Do not exceed an overall length of 500 mm between the release button and the switch.




Compatible with P-KUBE 2 safety handles

P-KUBE 2 safety handles are applied on doors or protections for perimetric safety barriers, where it is necessary to control the access to dangerous parts of machinery or installations.


When assembled with the lockable NG safety switch equipped with RFID technology, these handles create an integrated closing system and monitor the access to dangerous areas. You will obtain a robust metal body, compact and configurable, incorporating an RFID safety switch with a pin for the centering of the door, an anti-panic release, an adjustable handle with a lock-out device to be closed with a padlock and a control console.

You can use the same item on right-handed and left-handed doors, both swing and sliding.


Article	Description
AP G1A-111P	Safety handles with LOCK OUT device and configuration with 3 adjustable plates

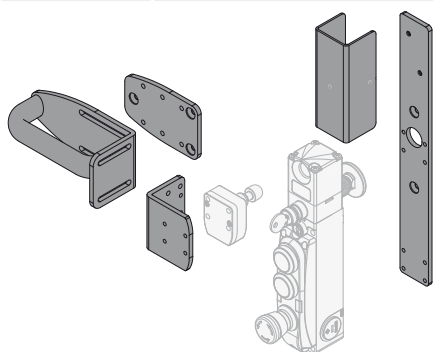

Article	Description
AP G1A-011P	Safety handles with LOCK OUT device and configuration with 2 adjustable plates

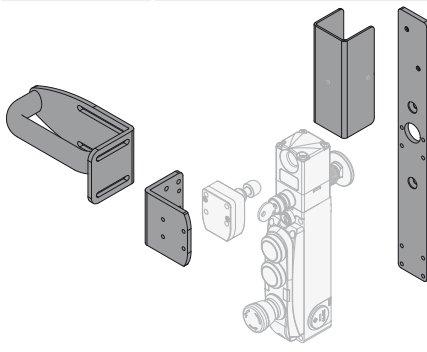

Article	Description
AP G1Z-200P	Safety handles with LOCK OUT device and configuration with 1 fixed plate

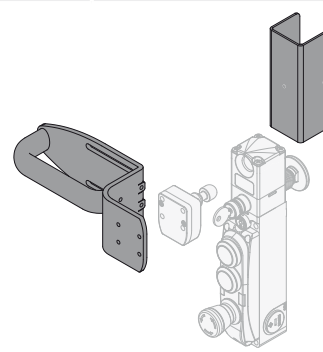


Adhesive labels for emergency release button



Polycarbonate yellow adhesive, rectangular 300x32 mm, red writing. Applied on the internal part of the jamb it helps finding the emergency release button.

Article	Description
VF AP-A1AGR01	PREMERE PER USCIRE
VF AP-A1AGR02	PUSH TO EXIT
VF AP-A1AGR04	ZUM OFFNEN DRUCKEN
VF AP-A1AGR05	POUSSER POUR SORTIR
VF AP-A1AGR06	PULSAR PARA SALIR
VF AP-A1AGR07	НАЖАТЬ ДЛЯ ВЫХОДА
VF AP-A1AGR08	NACISNAĆ ABY WYJŚĆ
VF AP-A1AGR09	PRESSIÓNAR PARA SAIR

Accessories


Article	Description
VF KLB300	Set of two locking keys
	Extra copy of the locking keys to be purchased if further keys are needed (standard supply 2 units). The keys of all switches have the same code. Other codes on request.

Series connection

To simplify serial connections, a series of M12 connectors are available that allow complete wiring.

This solution significantly reduces installation times, whilst maintaining the maximum PL e and SIL 3 safety levels.

For further information see page 290 - CATALOGUE SAFETY 2015/16.

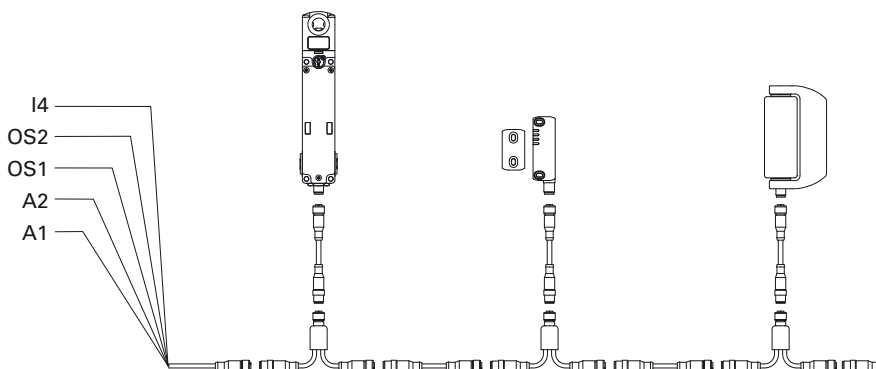



General Catalogue
Detection



General Catalogue
HMI



General Catalogue
Safety



General Catalogue
LIFT



DVD



Web
www.pizzato.com



Pizzato Elettrica s.r.l. Via Torino, 1 - 36063 Marostica (VI) Italy
Phone +39.0424.470.930 - Fax +39.0424.470.955
E-mail: info@pizzato.com - Web site: www.pizzato.com

ZE FGL16A16-ENG

